



SPECIFICATIONS

L.O.A*:	11.14 m
Length of hull:	9.99 m
Width of hull:	4.00 m
Light displacement EC:	7 450 kg
Air draught**:	3.62 m
Air draught***:	7.64 m
Draft:	1.00 m
Fuel tank(s):	800 l
Water tank:	320 l
Maximum engine power:	1x425 HP
Max engine certification:	425 HP
EC certification required:	B8 / C10 / D11

* (with aft swimming platform)

** (with mast folded)

*** (with mast in position)

ARCHITECTS

BENETEAU POWER

M. JOUBERT & B. NIVELT

STANDARD EQUIPMENT

CONSTRUCTION

HULL

Composition: Sandwich (Polyester resin - Glass fibre / Balsa core) - White gel-coat - Structural hull counter moulding in monolithic laminate (Polyester resin - Glass fibre) - Profile: Semi-floating hull - Stainless steel guard sheer rail on hull -

DECK

Composition: Sandwich (Polyester resin - Glass fibre / Balsa core) - Structural counter moulding in monolithic laminate (Polyester resin - Glass fibre) - White gel-coat - Diamond tip type non-slip covering -

DECK EQUIPMENT

Gangway door to starboard -

MOORING -ANCHORING

Stainless steel bow fitting - Stainless steel bow roller and swing - 6 Mooring cleats (L 300mm) - Stainless steel gunwale guards - 1 Mooring locker with self-bailer - Hood cover -

PERSONNEL GUARDS

Handrails in cockpit - Open pulpit, in stainless steel

COCKPIT

Self-bailing cockpit - 1 Locker in cockpit bottom gas piston assisted and lockable - Gas cylinder locker - Hot/cold water cockpit shower hose - Cockpit gate in transom - Plain solid wood decked swim platform - 1 Stainless steel swimming ladder, in position - 1 Access door to catwalk from cockpit with grey-tinted porthole -

FLY BRIDGE

Flybridge self-bailing - Stainless steel access ladder to flybridge with plain solid wood steps and handrails stainless steel - polyester trap door with gas piston - Grey tinted windscreen in PMMA - Stainless steel pulpit surrounding aft of flybridge - Mast, Navigation light mounting, Radar, Aerials and deck spotlight - Pilot console with control panel including: Electric engine controls*, Electric windlass control, Thruster* and Flaps - Fuel gauge indicator - Tiller angle indicator - Space for navigation electronics - Steering wheel Stainless steel - Steering compass - Hydraulic steering - Fog horn - Socket 12 V - 1 Adjustable pilot seat - flybridge saloon to port consisting of L-shaped bench seat with fitted storage space and removable plain solid wood table - (Cushions "Columbia") -

* according to options

INTERIOR LAYOUT

Alpi woodworking in fruit tree colour - Laminated floorboards with black wood streaking - Cushions "Paradise sand" -

SALOON

Height to deck beam: 1.96 m.

Sofa convertible into double berth (1.20 m x 2.00 m) - Height adjustable fold down saloon table in varnished wood - 2 Director armchairs - Grey-tinted glass opening side panels and white lacquered aluminium frame - Storage cupboards - Cubby hole lockers - 3 leaved aft window door with black lacquered aluminium frame - Pillar in stainless steel - CD/MP3 player with jack and USB ports, 2 loudspeakers in wheelhouse and 2 loudspeakers in cockpit -

GALLEY

Height to deck beam: 1.96 m.

U-shaped kitchen - Includes: Work top - 2 Stainless steel sinks with cold/hot water mixer taps under pressure - 2 hob cooker and gas oven - Electric refrigerator 130 L front opening (Supply 220 V/12 V) - Cutlery drawer - Storage - Rubbish bin -

STEERING STATION

Two-seater pilot and copilot bench - Removable floor step - Storage under pilot bench - Sliding side door with direct access to catwalk, to starboard -

Clear glass windscreen with aluminium frames, lacquered white - 3 Electric windscreen wipers - Windscreen washer - Demister - Door to access catwalk - Fixed grey-tinted window with white lacquered aluminium frame fitted with curtains - Instrument panel with wide space for fitting navigation electronics - Engine dials: Revolution counter, Fuel gauge, Warnings, Tiller angle indicator, Flap indicators - Electric windlass control*, Bow and stern thrusters*, Navigation lights, Electric windscreen wipers and foghorn, Engine control - Steering wheel - Steering compass - Socket 12 V -

* according to options

WASHROOM (TO STARBOARD)

Height to deck beam: 1.85 m.

Washroom completely counter moulded - Mirror - Upper cupboard, Lower cupboard - Electric pump for shower draining - 1 Opening deck hatch, with blackout curtains - 1 Opening porthole(s) with curtain -

Quiet flush electric toilet, Basin, Mixer tap - Rigid sewage water tank 88L - Chrome toilet paper holder - Glass holder with glass - Shower curtain -

OWNER CABIN (FORWARD)

Height to deck beam: 1.95 m.

Double berth (1.99 m x 1.60 m) - Marine mattress - Mirror - 2 Closets, one with shelves - Large storage space under berths - 1 Opening deck hatch, with blackout curtains - 2 Opening hull portholes with blackout curtains -

GUEST CABINS (TO PORT)

Height to deck beam: 1.85 m.

Bunk beds (0.72 m x 1.85 m) - Marine mattress - Lower cupboard - Storage under berth - 1 Deck house sunroof with fitted mosquito net - 2 Opening porthole(s) with blackout curtain -

ENGINE

Shaft line propulsion - Four blade propeller - Single engine Cummins QSB5.9I - 425 HP (313 Kw) - Fuel filter with decanter - Sea water filter - Engine room soundproofed with high density foam 40mm thick - Air intakes for engine hold cooling, on deck - Extinguisher - Fuel tank deck filler Stainless steel - Aluminium fuel tank(s) (Capacity 800 l) - Steering system: Hung rudder, in stainless steel - Hydraulic steering - Electric trim tabs -

ELECTRICAL SYSTEM

Electrical panel 12 V / 220 V - Shore power socket 220 V - 2 Engine batteries 12 V 50 Ah - 1 Service battery 12 V 140 - Battery charger - 2 Sockets 12 V - Interior lighting (Overhead lights, reading lights) - Outside lighting (Navigation lights, Mooring light, Spot cockpit)-

WATER SYSTEM

1 Manual bilge pump (Cockpit) - 1 Electric bilge pump Automatic - Water pump for pressurising hot/cold water system - 25L Water heater with 220V exchanger - Water tank filler Stainless steel - 1 Rotational moulded water tank(s) (1 x 320 l) -

TRIM LEVEL

	AVANTAGE	ELEGANCE
Electric windlass 1000W	■	■
Deck searchlight	■	■
White lacquered aluminium loading boom	■	■
Pump for deck washing	■	■
Shore freshwater supply with pressure regulator	■	■
Sun mattress forward Cushions Columbia	■	■
Flat screen TV LCD + DVD/MP3 player in the saloon	■	■
Multifunction screen GPS C90W		■
Auto pilot ST70 RV2		■
Pilot repeater on flying bridge		■

OPTIONS


PACKS

PACK ELECTRONIC


- Digital radar 4 Kw 48 MN
- Raymarine 240^E double set DSC VHF coupled to AIS receiver RAYMARINE



OTHER OPTIONS

- Complete mooring kit (Anchor Delta 12 kg - 4 Mooring ropes - 6 Fenders)
- Hydraulic gangplank
- Rear closure Cushions "Dune"
- flybridge Bimini top upholstery "Dune"
- Starboard cockpit and catwalk decked in solid plain wood
- White outside wheelhouse curtains
- 5,5KVA Electric generator
- Air conditioning 220 V or 110 16 000 BTU in wheelhouse + 12 000 BTU for cabins
- Forced air heating fuel
- Oven Grill Micro-wave oven (as replacement for gas oven)
- Dishwasher 220 V
- Ice maker
- Steel blue hull
- "Tweed" pattern carpet in wheelhouse
- Flat screen TV + DVD player in master cabin
- Shore freshwater supply

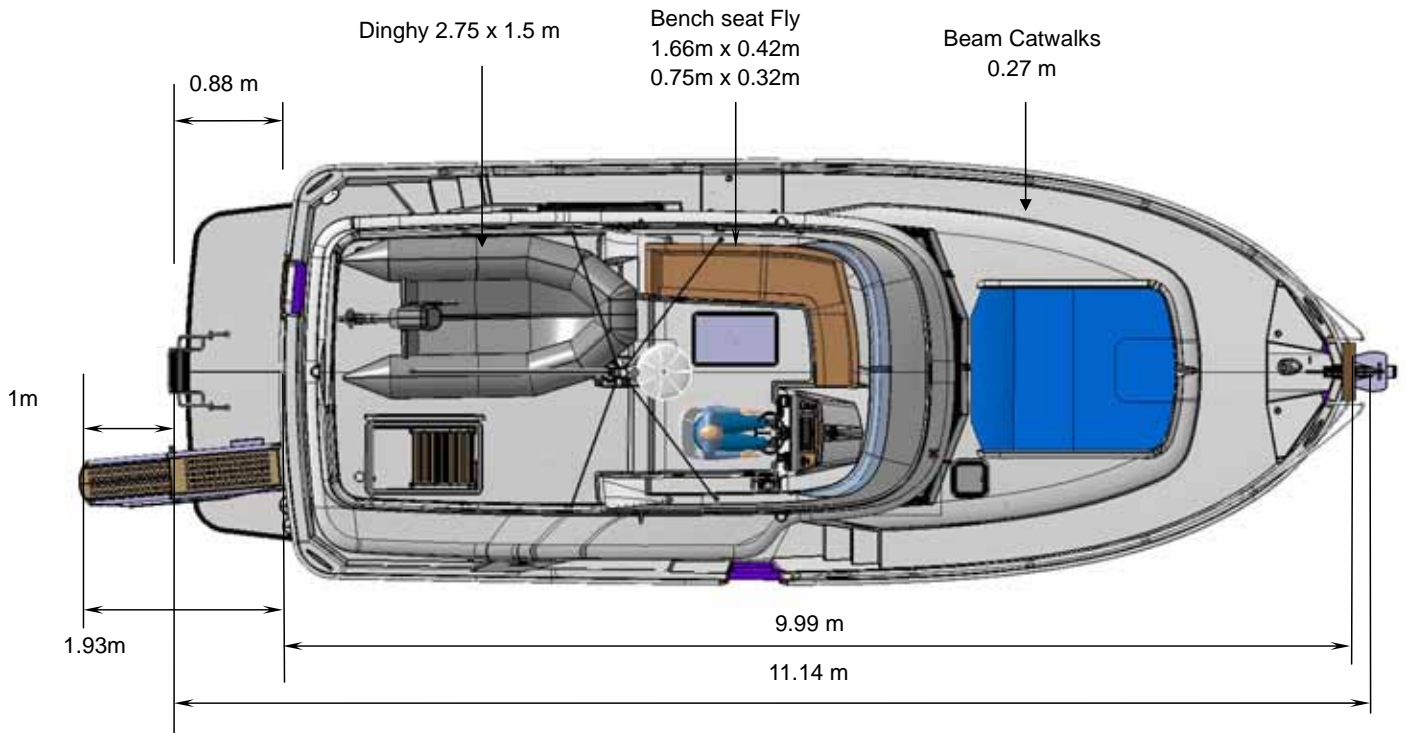

Air draught max: 7.64m

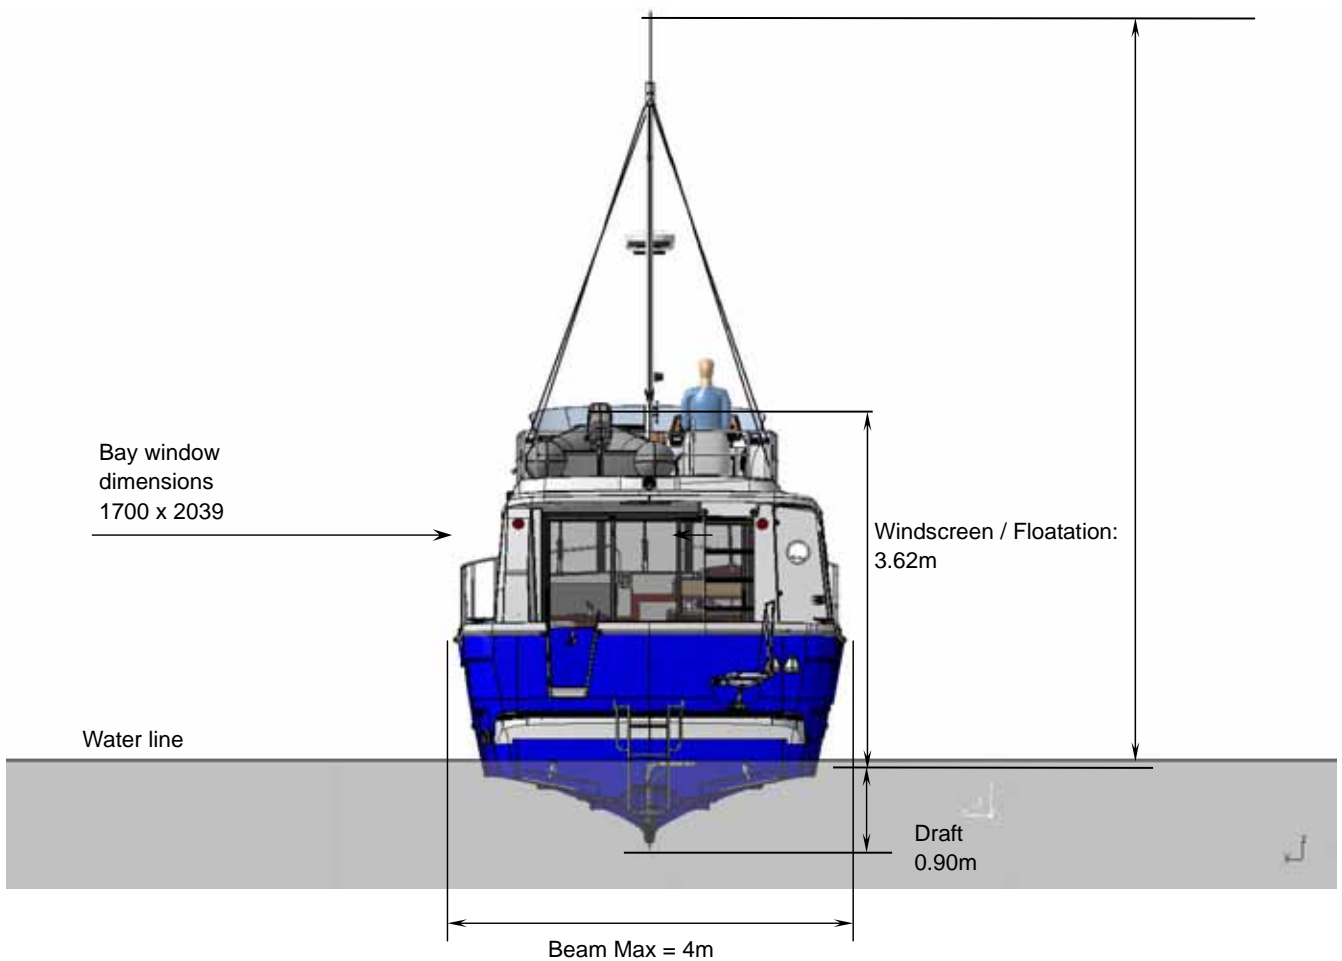

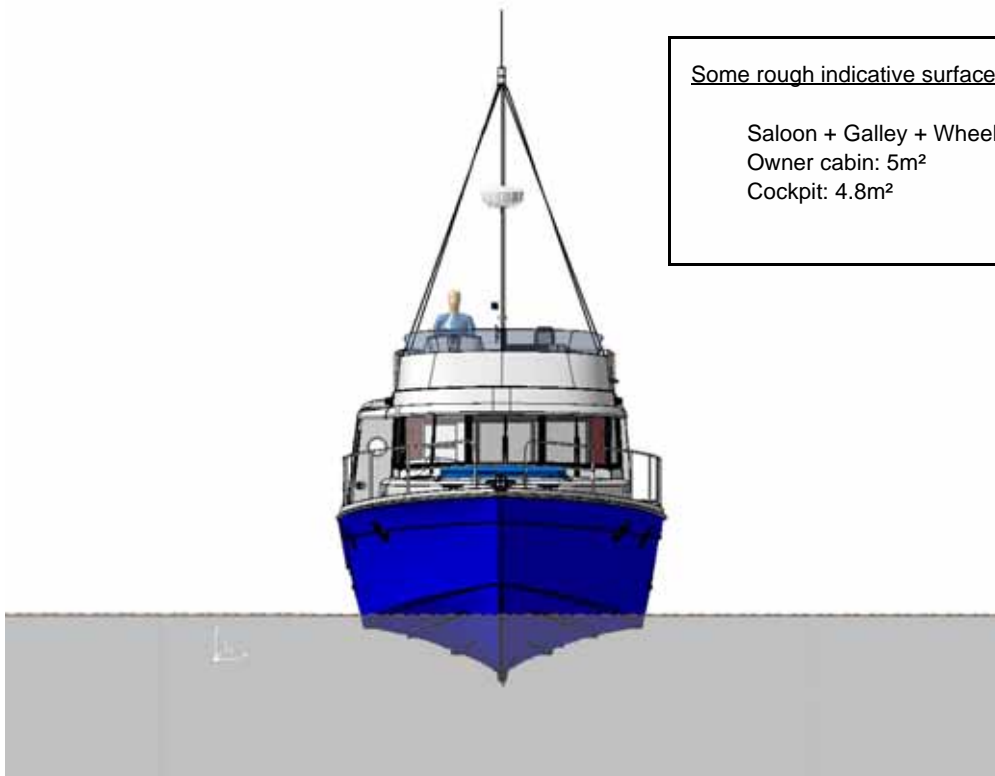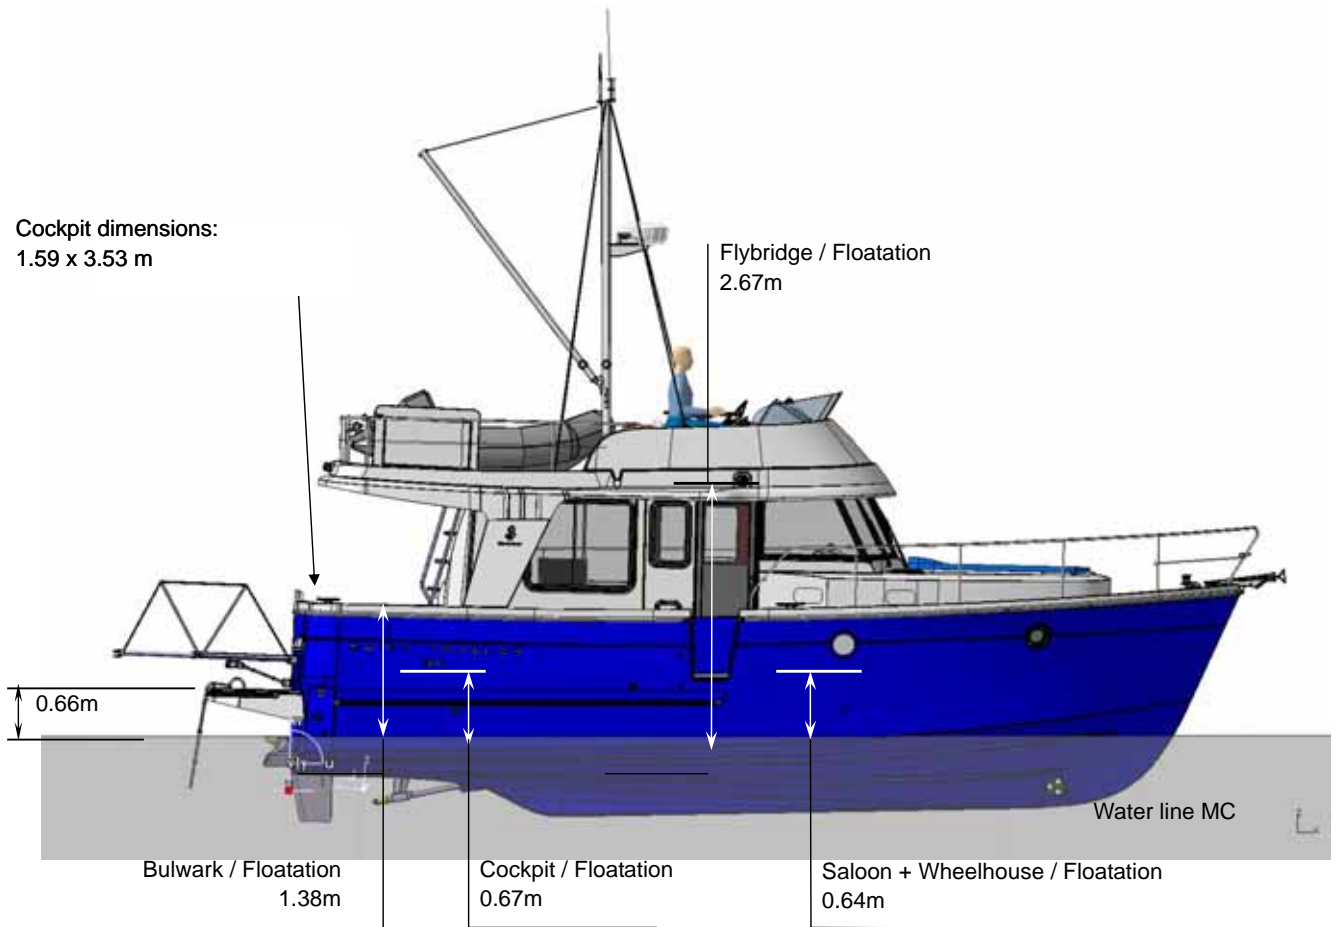

Some rough indicative surfaces:

- Saloon + Galley + Wheelhouse: 7.5m²
- Owner cabin: 5m²
- Cockpit: 4.8m²

Provisional General Equipment

